


LED CONTROL

220V AC control panel, with 24V output to control the on, off or intensity of LED lights. It can be controlled through the app and controls.

CONNECTIONS

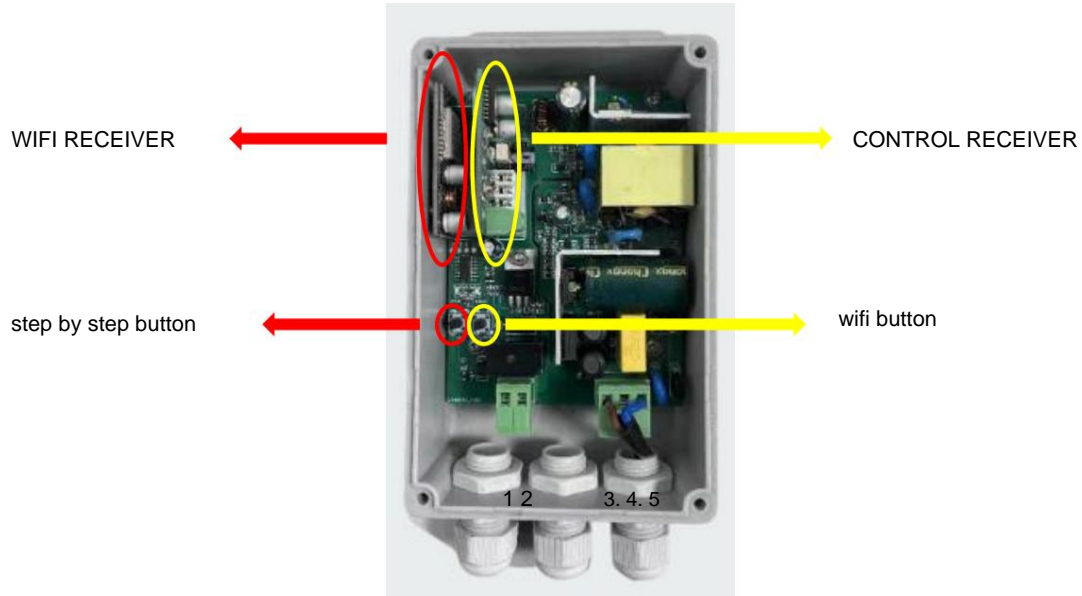

1	+	24V output led light
	-	
23	Phase	
4	Land	
5	Neutral	

Note: LED lights have polarity, you must connect positive and negative correctly.

PROGRAMMING A REMOTE

Commands must be recorded in the command receiver, the receiver has two channels. Channel 1 turns on the LED and channel 2 turns off the LED. You will need to program a different button on each channel.

Process:

1-Select the desired brand, setting the Dip's configuration. If not, go to the next step.

Note: if the device you purchased has the RX MULTI receiver see the following table

2.- press the receiver channel (the LED will light up)

3.- press the button on the remote control until the LED on the receiver flashes.

Perform steps 2 and 3 each time you want to record a command

LED CONTROL

MEMORY ERASE

You must hold down any channel until the LED turns off, both channels will be completely erased.

CONFIGURE A DEVICE TO WIFI

NOTE: THE WIFI NETWORK MUST BE 2.4G, IF YOU HAVE A 2.4 AND 5G WIFI NETWORK MAKE SURE THAT THE PASSWORDS ARE DIFFERENT, OTHERWISE A CONFLICT WILL BE CREATED.
DEVICE SYNCING


- 1- Download the "DASPI" APP from:



- 2- Create new account




- 3- Add device

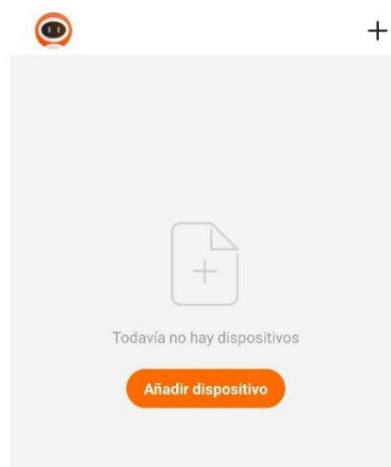


LED CONTROL



4-Select type of device to add, in this case **“receiver”**

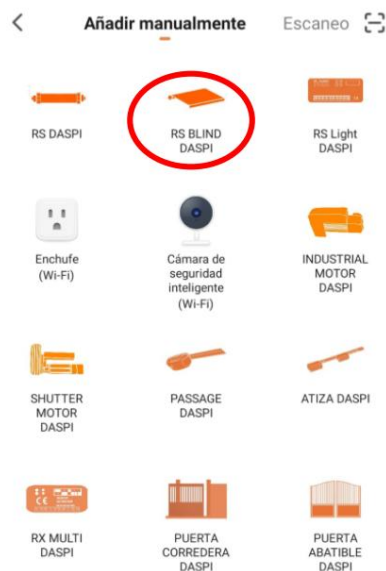


5-First check that the device is connected to the electrical current, then press **“the confirmation light on flash”**

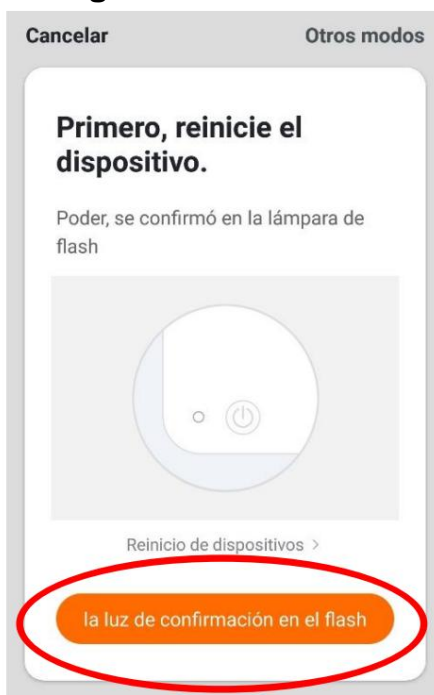

LED CONTROL

6- Connect the mobile phone to the Wi-Fi with which the receiver will work.

7- Enter the Wi-Fi network and password in the APP to confirm the receiver where we want it to connect. Press confirm.

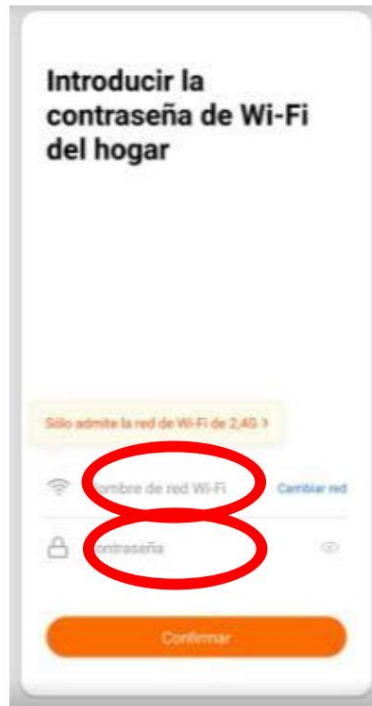

8- Press and hold the wifi button on the box until it flashes



9- The receiver was added successfully. Press “Done”

LED CONTROL

10- Once added we can control the maneuvers from the mobile device.

7. Add a user


7.1. We select “edit”, located at the top right of the screen.

7.2 we select “share equipment”




7.3 we select “add what was shared”

LED CONTROL

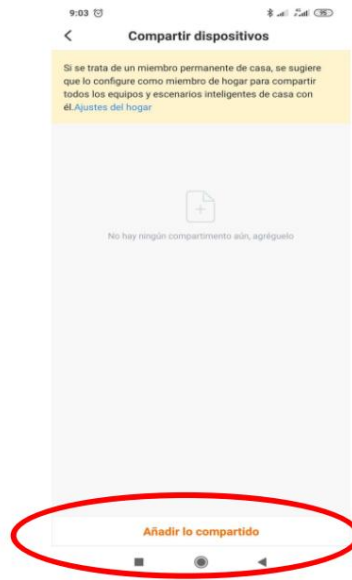

7.4 we enter country and telephone number

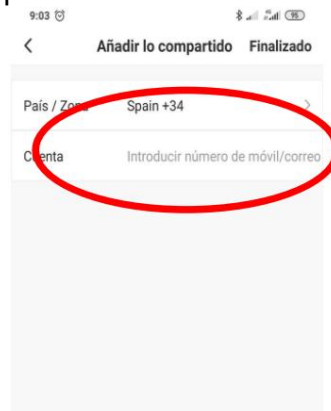

7.5 we select "Finished"

